


ISSUED	<b>OUTLINE DIMENSIONS SHEET</b>	MODEL <b>AMRC-- AMRCNH</b>
REVISED		PAGE <b>6 of 13</b>

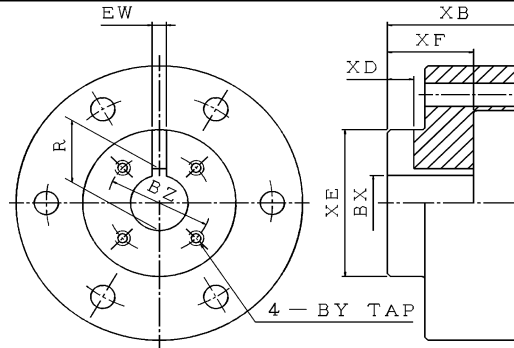

Dimension in inches

FRAME SIZE	BX	BY	BZ	EW	R	XB	XD	XE	XF
213T 215T	0.751	No.10 - 32 UNF	1.375	0.188	0.845	1.750	0.406	2	1.125
	0.876	No.10 - 32 UNF	1.375	0.188	0.970	1.750	0.406	2	1.125
	0.938	No.10 - 32 UNF	1.375	0.250	1.078	1.750	0.406	2	1.125
	*1.001	No.10 - 32 UNF	1.375	0.250	1.126	1.750	0.406	2	1.125
254T 256T	0.751	No.10 - 32 UNF	1.375	0.188	0.845	2.17	0.41	2.25	1.23
	0.876	No.10 - 32 UNF	1.375	0.188	0.970	2.17	0.41	2.25	1.23
	*1.001	No.10 - 32 UNF	1.375	0.250	1.126	2.17	0.41	2.25	1.23
	1.188	1/4" - 20 UNC	1.750	0.250	1.313	2.17	0.41	2.25	1.23
	1.251	1/4" - 20 UNC	1.750	0.250	1.376	2.17	0.41	2.25	1.23
284T 286T	0.751	No.10 - 32 UNF	1.375	0.188	0.845	2.17	0.41	2.25	1.23
	0.876	No.10 - 32 UNF	1.375	0.188	0.970	2.17	0.41	2.25	1.23
	1.001	No.10 - 32 UNF	1.375	0.250	1.126	2.17	0.41	2.25	1.23
	*1.188	1/4" - 20 UNC	1.750	0.250	1.313	2.17	0.41	2.25	1.23
	1.251	1/4" - 20 UNC	1.750	0.250	1.376	2.17	0.41	2.25	1.23
324T 326T	1.001	No.10 - 32 UNF	1.375	0.250	1.126	2.54	0.41	2.875	1.54
	*1.188	1/4" - 20 UNC	1.750	0.250	1.313	2.54	0.41	2.875	1.54
	1.251	1/4" - 20 UNC	1.750	0.250	1.376	2.54	0.41	2.875	1.54
	1.438	1/4" - 20 UNC	2.125	0.375	1.625	2.54	0.47	2.875	1.54
	1.501	1/4" - 20 UNC	2.125	0.375	1.688	2.54	0.47	2.875	1.54
364T 365T	1.001	No.10 - 32 UNF	1.375	0.250	1.126	2.54	0.41	2.875	1.54
	*1.188	1/4" - 20 UNC	1.750	0.250	1.313	2.54	0.41	2.875	1.54
	1.251	1/4" - 20 UNC	1.750	0.250	1.376	2.54	0.41	2.875	1.54
	1.438	1/4" - 20 UNC	2.125	0.375	1.625	2.54	0.53	2.875	1.54
	1.501	1/4" - 20 UNC	2.125	0.375	1.688	2.54	0.53	2.875	1.54
404T 405T	1.188	1/4" - 20 UNC	1.750	0.250	1.313	2.76	0.53	3.15	1.5
	1.251	1/4" - 20 UNC	1.750	0.250	1.376	2.76	0.53	3.15	1.5
	1.438	1/4" - 20 UNC	2.125	0.375	1.625	2.76	0.53	3.15	1.5
	*1.501	1/4" - 20 UNC	2.125	0.375	1.688	2.76	0.53	3.15	1.5
	1.688	1/4" - 20 UNC	2.500	0.375	1.891	2.76	0.53	3.15	1.5
	1.751	1/4" - 20 UNC	2.500	0.375	1.954	2.76	0.53	3.15	1.5

- Note :**
1. Tolerance On BX Dimension Up To And Including 1.500 Inches Diameter : +0.001 inches -0.000 inches,  
Larger Than 1.500 Inches Diameter : +0.0015 inches -0.0000 inches.
  2. Dimension EW Tolerance : +0.002 inches -0.000 inches.
  3. Dimension R Tolerance : +0.010 inches -0.000 inches.
  4. \* Marked, Applied To Standard Size For Each Frame.

APPD.		<b>B</b>	DWG NO.
CHKD.			<b>31057D67621</b>
DWN.			